


## Turnstile ID Gate 1900 Single

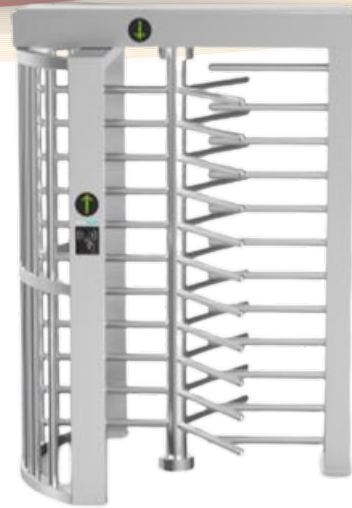

### Description

Our **ID GATE 1900** Single is a turnstile that can be used in various applications such as parking garages, airports, public transport, as well as industrial and production buildings.

The ID GATE 1900 Single is also used in stadiums to control access to the stadium or VIP area. Overall, the ID GATE 1900 is a reliable solution for access control that helps to increase the security and comfort of visitors.




Manual control  
Input direction



2080mm high  
interior



Fully welded



90° / 120° Rotor Optional  
(three or four sections)



Anti-trailing function:  
one person can pass at the same time







### APPLICATIONS

- Parking garages
- Airports
- Public Transport
- Industrial and production buildings
- Stadiums

### HIGHLIGHTS

- Durability, high operational reliability and fast response
- One-sided or two-sided operation
- Automatic reset function (The turnstile is automatically locked within 5 seconds when the passenger delays the entry).
- Automatic anti-panic function that guarantees free passage in emergency situations (e.g. power failure or fire alarm)
- Inside / Outside
- Built-in LED indicators for continuity clearance
- 3 year warranty

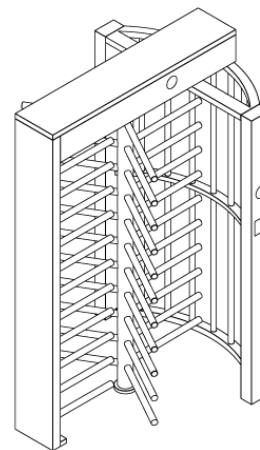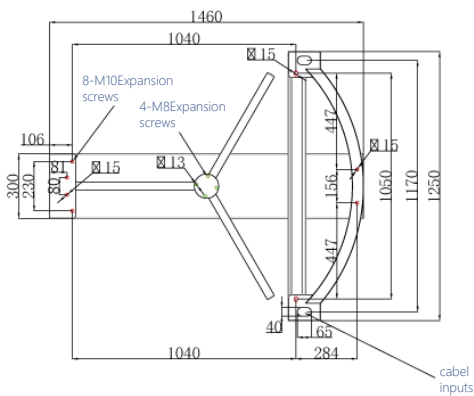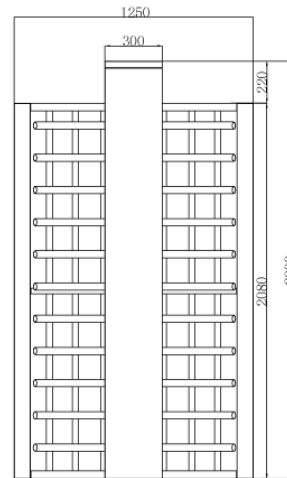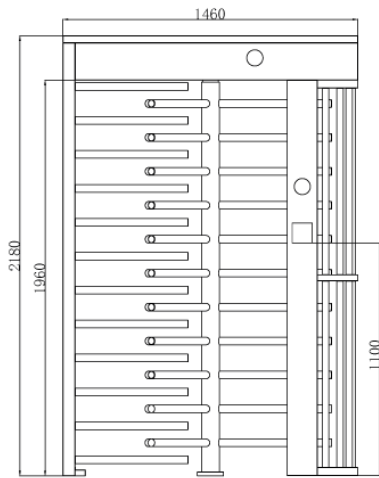

## TECHNICAL DATA

| Specification           |  |
|-------------------------|--|
| Dimension               | 1460 * 1250* 2180mm (L x W x H)  |
| Passage width           | 2 passages, 550mm (for pedestrians), 900mm (for wheelchair users)  |
| Direction               | Unidirectional / bidirectional   |
| Material                | Stainless steel (304)  |
| Power supply            | AC230V/110V, 50/60Hz   |
| Power consumption       | 40W  |
| Operating voltage       | 24V DC   |
| Throughput frequency    | 35-40 people per minute  |
| Emergency mechanism     | Automatic opening of the turnstile   |
| Communication interface | TCP/IP, RS485, dry contact, relay signa  |
| Net weight              | 200kg/piece  |
| Operating temperature   | - 15 °C up to 60 °C  |
| Optional                | <ul style="list-style-type: none"> <li>RFID Reader (Mifare / EM / Hitag)</li> <li>Barcode / QR Code Reader</li> <li>Combined QR Code / RFID</li> <li>Remote control (cable / radio)</li> </ul> <p>Third party reader installation on request</p> |