

ID SWING GATE 1600





Description

The **ID SWING GATE 1600** is a versatile access control solution suitable for a range of applications, including gyms, spas, and health centers.

It ensures only authorized persons are granted access while restricting entry to specific areas. This Swing Gate provides a reliable solution for a secure and controlled environment, making it an excellent choice for various establishments.

DIMENSIONS

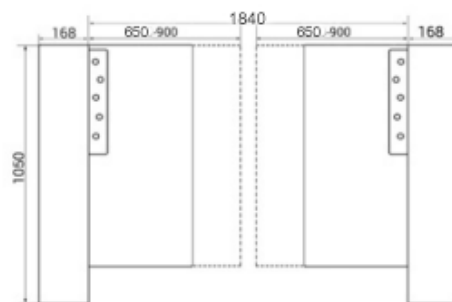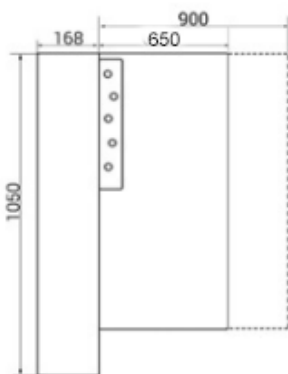

► HIGHLIGHTS

- Durability, high operational reliability and fast response
- One-sided or two-sided operation
- Automatic reset function
- Transponder or ticket-based entry and exit possible, alternatively free passage
- Automatically opening hinged door that guarantees free passage in emergency situations (e.g. power failure or fire alarm)
- Integrated LED indicators show the throughput direction
- 3 year warranty

► Accessories (Optional)

- 2x RFID-Reader (NXP MIFARE® Ultralight, Classic 1k / 4k)
- Wireless Remote Control
- Foreign reader installation (z.B. MIFARE, LEGIC, EM, HID, etc.)

TECHNICAL DATA

Specification	
Dimensions	168 x 168 x 1050mm (L x B x H)
Passage width	900mm - 1800mm
Material	Stainless steel (304) and acrylic glass - wing doors
Power supply	AC230V/110V, 50/60Hz
Operating voltage	24V DC
Emergency Mechanismus	Automatically opening wing doors
Communication interface	RS485, dry contact, relay signal
Operating temperature	-20 °C up to 70 °C
Optional	<ul style="list-style-type: none">• RFID Reader (Mifare/ EM / Hitag)• Barcode / QR Code Reader Third party reader installation on request

ACCESSORIES (OPTIONAL)

Product Accessories	
Accessories (Optional)	<ul style="list-style-type: none">• 2x RFID-reader (NXP MIFARE® Ultralight, Classic 1k / 4k)• Wireless Remote Control• Foreign reader installation (z.B. MIFARE, LEGIC, EM, HID, etc)