




ID SWING GATE 2600

Description

The **ID SWING GATE 2600** is a versatile Speed Gate that is perfectly suited for use in swimming pools, spas, or wellness centers. Access control helps to manage the flow of customers and secure specific areas such as changing rooms or storage.

Additionally, the ID SWING GATE 2600 can also be used in other applications, such as fitness studios or health centers. The Swing Gate is an effective access control solution that enables targeted crowd control to ensure a safe and pleasant experience.

DIMENSIONS

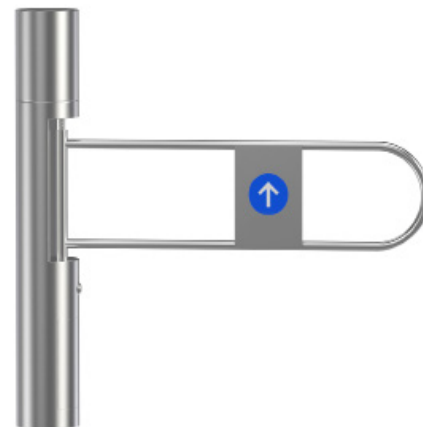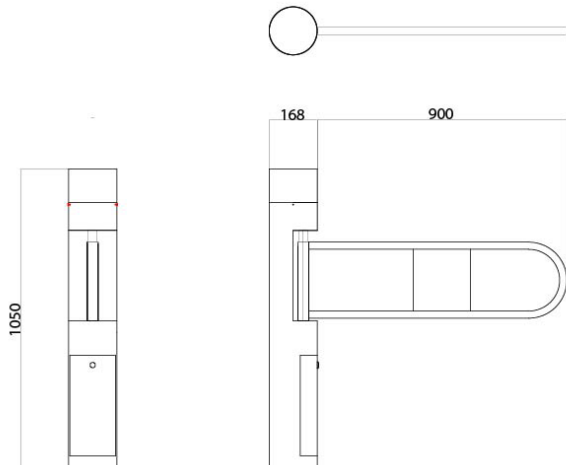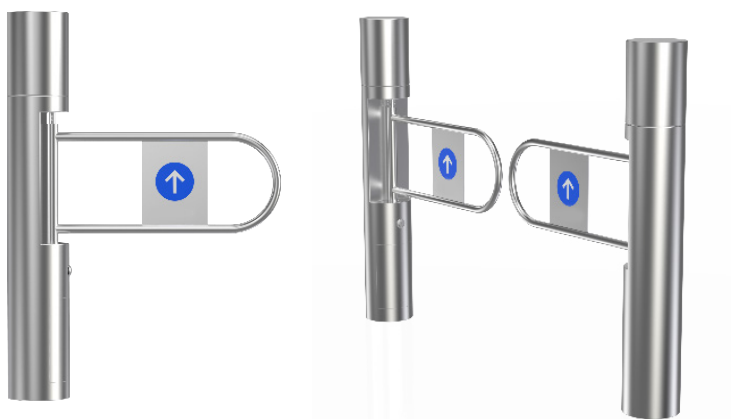

HIGHLIGHTS

- Durability, high operational reliability and fast response
- Automatic gate
- One-sided or two-sided operation
- Indoor and outdoor
- 3 year warranty

Accessories (Optional)

- 2x RFID-Reader (NXP MIFARE® Ultralight, Classic 1k / 4k)
- Wireless Remote Control
- Foreign reader installation (z.B. MIFARE, LEGIC, EM, HID, etc.)

TECHNICAL DATA

Specification	
Dimensions	168 x 168 x 1050mm (L x B x H)
Passage width	650 und 900mm
Material	Stainless steel (304)
Power supply	AC220V/110V, 50/60Hz
Power consumption	40W
Operating voltage	24V DC
Throughput frequency	30 people per minute
Emergency Mechanismus	Automatic opening hinged door
Communication interface	RS485, dry contact, relay signal
Operating temperature	-20 °C up to 75 °C
Protection class	IP65 (for indoor and outdoor use)
Optional	<ul style="list-style-type: none"> • RFID Reader (Mifare /EM / Hitag) • Barcode / QR Code Reader • Combined QR Code / RFID • Remote control (cable / radio) <p>Third party reader installation on request</p>

ACCESSORIES (OPTIONAL)

Product Accessories	
Accessories (Optional)	<ul style="list-style-type: none"> • 2x RFID Reader (NXP MIFARE ® Ultralight, Classic 1k / 4k) • Wireless Remote Control • Foreign reader installation (z.B. MIFARE ®, LEGIC, EM, HID, etc.)